PTT60

Pedestrian Tow Tractor



Improve safety and productivity by reducing the strain involved in the transport of common industrial carts.

TOWING CAPACITY
6,000 lbs.

BATTERY
Integrated 205AH lithium battery and 120vac charger. Support for optional external 240vac charger for greatly reduced charging times.
SB175 connector

TRAVEL SPEED
Variable from 0 mph to 3.4 mph empty
Variable from 0 mph to 3.1 mph loaded

WEIGHT
1,875 lbs.

TIRES / CASTERS
DRIVE
(1) 9" x 2.95" polyurethane
Load Wheels
(2) 8" x 2.99" polyurethane

DRIVE
24-Volt AC with **electronic power steering**


BRAKE
Electromagnetic brake


CONTROLS & FEATURES
Powered tow hitch elevating system with adjustable mounting plate supports hitch heights from from 6.9" to 12.4" from floor level and delivers a lift stroke of 4.5". Standard pin style pin connection supports integration with many common types of industrial carts.

Ergonomic control head with wrap around hand guard, dual butterfly travel controls with infinitely variable forward and reverse travel control, reversing switch, key switch, battery discharge indicator and horn as standard equipment.


OPTIONS

- Ball, Clevis, Frame grab, and other custom hitch tools
- Traction Drive Tire
- External 240/1/60 Charger for faster opportunity and full cycle charging

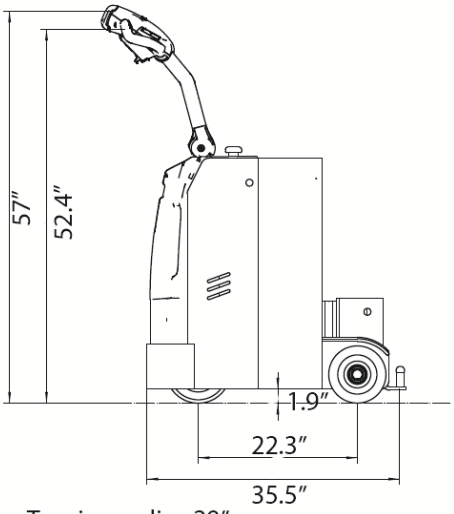

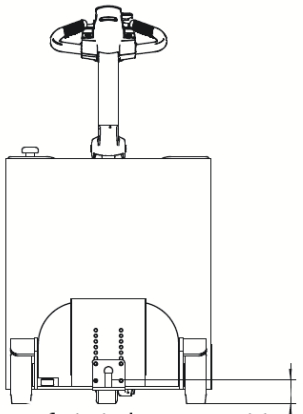

6.9″ to top of pin in lowest position
12.4″ to top of pin in highest position
4.5″ powered lift range

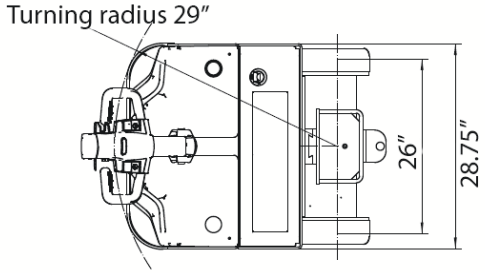

Maximum gradeability
3% Loaded
15% Unloaded