


Aisle Guide

CB22 - Right Angle Stacking

Load Width	Load Length		
	36"	40"	48"
36"	115"	120"	125"
40"	115"	120"	125"
48"	115"	120"	125"

For ease of use add 6 to 12' to aisle dimension listed

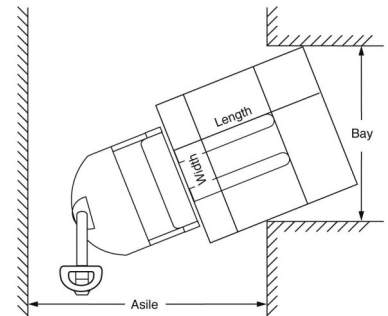

Aisle dimensions listed above assume 4" between loads. Use the larger dimension; load width or load length. For ease of use and add 6" to 12" for operator clearance to the appropriate specifications listed above. Truck performance may vary due to application requirements' and changes in model design.

Add: 2" to aisle for model CB22-157 with triple stage mast.

Model #	Mast	Lift Height	Col Height	Free Lift	Ext Height w/LBR	Gradability		³ Weight Chassis Only
		A	C	D	E	Loaded	Unloaded	
2200 Capacity @ 24" Load Center ITA Class II Fork Carriage								
CB 22-104	Two Stage	104	72.3	6	143	5%	8%	4005
CB 22-128	Two Stage	128	83.2	6	165	5%	8%	4082
CB 22-157*	Triple Stage	157	71.0	50	193	5%	8%	4422

*Estimated shipping weight without battery

³ Estimated shipping weight without battery