


# WINCH OPERATED TRUCK JIB CRANE WTJ-4-G

\*\* Any additions, deletions or omissions must be corrected on this drawing, as this drawing will be considered all inclusive. \*\*  
 \*\* All graphics provided are for reference only. If certain dimensions are critical please verify those dimensions with your salesperson \*\*

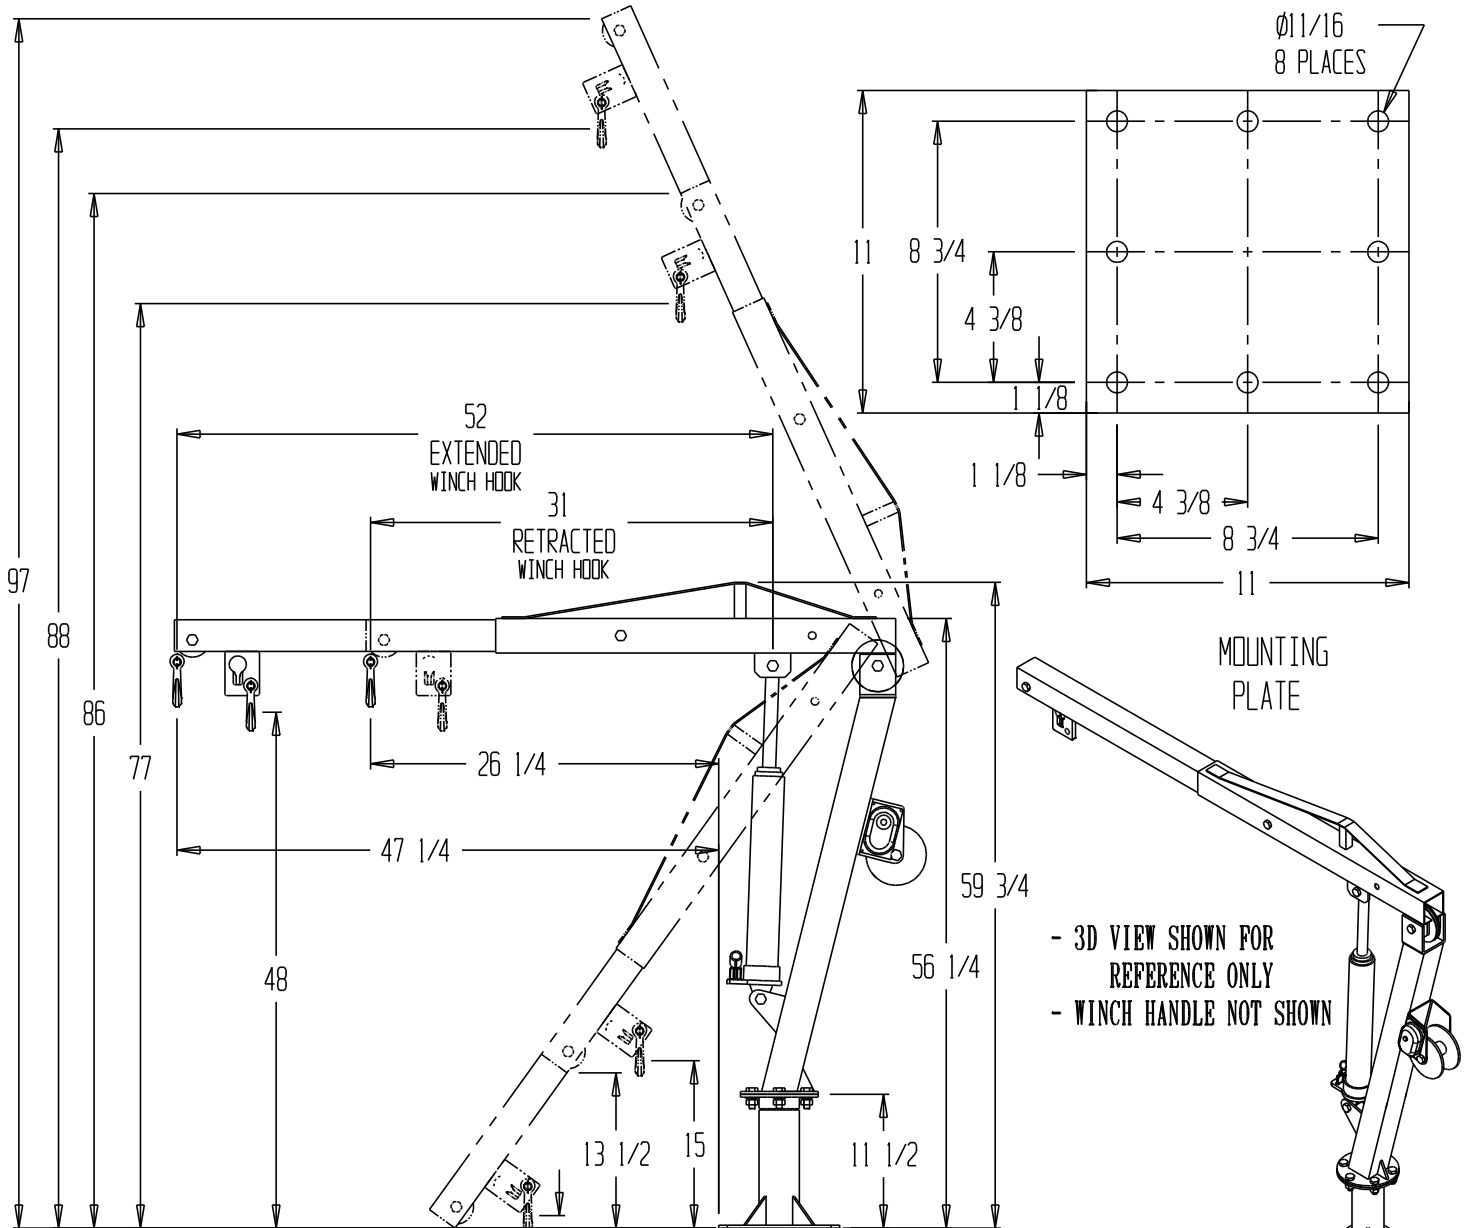

## STANDARD FEATURES

- MODEL NUMBER: WTJ-4-G
- LIFTING BALE CAPACITY: 1,000 LBS. EXTENDED, 2,000 LBS. RETRACTED
- HOOK CAPACITY: 500 LBS.
- MAX WINCH CAPACITY: 500 LBS.
- USABLE REACH: 52" EXTENDED, 31" RETRACTED
- MAX HOOK HEIGHT: 97" EXTENDED, 86" RETRACTED
- MIN. HOOK HEIGHT: 0" EXTENDED, 13 1/2" RETRACTED
- OVERALL CABLE LENGTH: 32 FEET
- USABLE CABLE LENGTH: 24 FEET
- PISTON STROKE: 16 3/8"
- PISTON STROKE PER PUMP: 1/16"
- CABLE RETRACTS / EXTENDS PER CRANK: 1-1/2"
- NO. OF CRANKS TO RETRACT / EXTEND CABLE: 72
- GALVANIZED STEEL FINISH

DIMENSION TOLERANCE +/- 1/2"

\*\*SPECIAL UNITS ARE NON-RETURNABLE  
 \*AVAILABLE AT ADDITIONAL COSTS

\*\*NOTE: HOOK CENTER HEIGHTS MAY VARY DEPENDING ON HOOK TYPE

All graphics provided are for reference only. If certain dimensions are critical please verify those dimensions with your salesperson

**A P P R O V A L**

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN & DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT & INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS & STANDARDS.

**UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE**  
 ( ) As drawn ( ) As marked

Signed: \_\_\_\_\_ Date: \_\_\_\_\_  
 Printed Name \_\_\_\_\_

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

## SPECIAL FEATURES

NONE

DISTRIBUTOR'S NAME: <b>HOF EQUIPMENT COMPANY</b>		P.O.#: -
PH: 888-990-1150		W.O.#: -
DRAWN BY: ND	DATE: 2-2-16	SALES: -
REFERENCE: -	SCALE: -	DRWG.#/FILE NAME:
QUOTED LEADTIME: -	QUOTE #: -	WTJ-4-G